

10-19-00

PATENT

Docket No. 1161

A
JC925 U.S. PTO
09/691713
10/18/00

JC946 U.S. PTO
10/18/00

Box Patent Application
Commissioner of Patents and Trademarks
Washington, D.C. 20231


NEW APPLICATION TRANSMITTAL

CERTIFICATION UNDER 37 CFR 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date OCTOBER 18, 2000 in an envelope as "Express Mail Post Office to Addressee" Mailing Label Number EG296080635US with proper postage affixed addressed to the: Commissioner of Patents and Trademarks, Washington, D.C. 20231.

FORREST L. COLLINS

(Type or print name of person mailing paper)

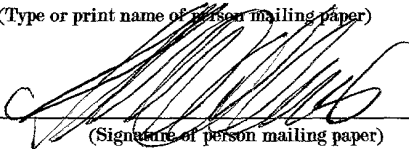
(Signature of person mailing paper)

Inventor(s): Coury & Massaad

WARNING: PATENT MUST BE APPLIED FOR IN THE NAME(S) OF ALL OF THE ACTUAL INVENTOR(S). 37 CFR 1.41(A) AND 1.53(B).

Title: Personal Gas Supply Delivery System

1. Type of Application

☒ Original

☐ Continuation

☐ Divisional

☐ Continuation-in-part (CIP)

2. Fee Calculation (37 CFR 1.16)

☒ Regular application

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

CLAIMS AS FILED

Number Filed	Number Extra	Rate	Basic Fee 37 CFR 1.16(a) \$710.00
Total			
Claims (37 CFR 1.16(c)) 30 - 20-	10 X	\$18.00	\$180.00
Independent			
Claims (37 CFR 1.16(b)) 3 - 3-	0 X	\$80.00	\$0.00
Multiple dependent claim(s), if any (37 CFR 1.16(d))		\$270.00	\$

REDUCTION FOR SMALL ENTITY STATUS OF 50% PER ATTACHED CLAIM FOR SUCH.

☐ Amendment canceling extra claims enclosed.

3. Fee Payment Being Made and Authorization to Charge Fees

☒ basic filing fee \$ 445.00
☐ recording assignment \$

4. Papers Enclosed Which Are Required For Filing Date Under 37 CFR 1.53(b) (Regular) or 37 CFR 1.153 (Design) Application

15 Pages of specification 1 Pages of Abstract
4 Pages of claims 5 Sheets of drawing 6 FIGURES

5. Additional papers enclosed

☐ Preliminary Amendment ☐ Cited References
☐ Information Disclosure Statement (37 CFR 1.98) ☐ Other
☐ FORM PTO-1449
☒ SMALL ENTITY STATUS enclosed

6. Declaration or oath

☒ Executed ☐ Unexecuted and enclosed


7. Assignment

☐ An assignment of the invention to was previously filed.
☐ A separate "Cover Sheet for Assignment (Document) Accompanying New Patent Application" is attached.

☒ 2 The Commissioner is hereby authorized to charge the following additional fees by this paper and during the entire pendency of this application to Account No. N/A

☒ 3 37 CFR 1.16(a)-(g)
☒ 4 37 CFR 1.17 (application processing fees)
☒ 5 credit any overpayment to Account No.

Total fees enclosed \$ 445.00

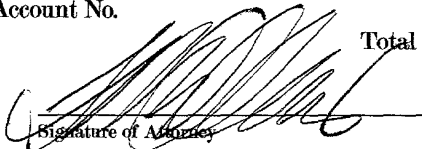
Signature of Attorney

FORREST L. COLLINS

Type or print name of attorney

Registration number 27,186

Forrest L. Collins

Post Office Box 41040

Brecksville, Ohio

44141-1043 Telephone: 440-526-0610

Facsimile 440-526-1819

Email: forpatents@aol.com

8. Benefit of Prior U.S. Application(s) (35 USC 120)

☐ The new application being transmitted claims the benefit of prior U.S. application(s)
☒ This transmittal ends with this page. (Application Transmittal 14-11--page 2 of 2)

Applicant or Patentee: Coury & Massaad
Serial or Patent No.:
Filed or Issued: October 18, 2000
Title: Personal Gas Supply Delivery System

Docket No. 1161

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS (37
CFR 1.9(f) and 1.27(b))-INDEPENDENT INVENTOR

As a below named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(C) for purposes of paying reduced fees under SECTION 41(A) and (B) of Title 35, United States Code, to the Patent and Trademark Office with regard to the above-entitled invention which is described in:

☒ the specification filed herewith.

☐ application serial no. 0 / _____, filed _____.

☐ patent no. _____, issued _____.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(C) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(D) or a nonprofit organization under 37 CFR 1.9(E).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below:

☒ no such person, concern, or organization

☐ persons, concerns or organizations listed below

FULL NAME _____

ADDRESS _____

☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(B)).

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under SECTION 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

Joseph E. Coury
Name of inventor

Joseph E. Curry
Signature

October 17, 2000

Date _____

John S. Massaad
Name of inventor


Signature

October 17, 2000

Date _____

Name of inventor

Signature

Date _____

Personal Gas Supply Delivery System

I hereby certify that this New Application Transmittal and the documents referred to as enclosed
5 therein are being deposited with the United States Postal Service on this date October 18, 2000 in an
envelope as "Express Mail Post Office to Addressee" Mailing Label Number EG296080635US with
sufficient postage affixed addressed to the: Assistant Commissioner of Patents and Trademarks, Box New
Application Washington, D.C. 20231.

10 FORREST L. COLLINS

(Type or print name of person mailing paper)

15 

(Signature of person mailing paper)

BACKGROUND OF THE INVENTION

Field of the Invention.

The purpose of this invention is to employ a gas flow alarm in a personal gas supply delivery system

5 Description of the Art Practices.

Hospitals, nursing homes, dental offices, clinics and a number of other health care institutions utilize medical gasses in rendering care to patients. It is well known to administer oxygen, air, and nitrous oxide to patients for treatment of a variety of different conditions or during surgical operations.

10 A number of medical institutions now employ medical gas systems which use a central gas supply source for providing a positive flow of medical gasses. These systems often utilize a network of conduits or supply lines to deliver the medical gas remote from the central source of the medical gas. The networks often include main and branch shut-off valves to enable isolation of a portion of the network in the event of damage or fire, or to effect needed repairs.

15 The lives of patients may depend on receiving a reliable source of the medical gas, a real need has developed to ensure that the medical gas system is functioning properly, and to annunciate an alarm in the event a malfunction or alarm condition is detected. Such conditions may occur, for example, when the shut-off valve is either partially or fully closed. In such circumstances, the necessary supply of gas may be insufficient or non-existent.

20 A further inadvertent interruption of the medical gas supply may occur when the medical gas is humidified. Commonly employed humidifying systems utilize a threaded plastic vessel that is screwed into a threaded plastic cap. If the threads of the threaded plastic vessel or threaded plastic cap are damaged or misaligned the medical gas may be lost to the surrounding environment with the consequent non-delivery of the medical gas to the patient.

25 There is a further need to detect other defects in the system that may impair the medical gas system effectiveness. For example, usage of the system may eventually result in low pressure conditions in the supply tank when the supply of gas is nearly exhausted. There is a further need for early detection of these problems so that replacement sources of medical gas may be provided to the patient before the medical gas delivery system becomes completely inoperative.

30 Finally, due to the escalating costs associated with medical care and the shortage of

trained nurses and technicians, monitoring of the medical gas delivery systems should be easy and capable of instant recognition of system faults. In particular, the recipient of the medical gas or a visitor of the patient should be able to recognize system faults.

Several methods using various apparatus have been employed to determine if a supply of a gas is within operating parameters. Such methods and apparatus are disclosed below.

United States Patent 6,067,022 granted to Laswick, et al., on May 23, 2000 describes an in-line low supply pressure alarm device powered solely by supply flow of pressurized gas from a gas supply for providing an alarm signal when supply gas pressure is below a selected minimum pressure. The alarm device includes a manifold having an input port for communicating with the supply gas supply, an output port for conducting the gas downstream and a manifold chamber disposed therebetween.

The Laswick, et al., patent utilizes gas powered alarms such as an audible reed alarm or a visual pneumatic alarm are connected to the manifold chamber via an alarm supply conduit, and produce an alarm signal when pressurized gas passes to the alarms. According to the Laswick, et al., patent a supply gas pressure sensor, in communication with the manifold chamber, produces an actuating flow of pressurized gas by activating a pressure switch, in response to sensing of an supply gas pressure below the selected minimum pressure.

United States Patent 6,067,022 to Laswick, et al., further provides a pneumatic alarm output switch, in the alarm supply conduit and in communication with the pressure sensor and pressure switch via an actuation conduit, controls gas flow to the alarms in response to the actuating flow. The Laswick, et al., patent preferably includes an alarm oscillation system is included for alternating the direction of the actuating flow to and from the alarm output switch, to open and close the alarm output switch thereby turning the alarm on and off in a cyclical fashion.

United States Patent 4,674,321 issued to Joshi on June 23, 1987 describes a leak detector employing an ion-conducting membrane is disclosed. The Joshi patent describes an oxygen-ion conducting membrane which employs a high vacuum on one side is used to detect very small quantities of oxygen flowing through a minute fissure in a part to be tested for leaks. The Joshi patent further describes an oxygen-ion conducting membrane which is biased with direct current voltage to drive oxygen-ions through the membrane away from the high vacuum side.

United States Patent 3,133,997 to Greene issued May 19, 1964 describes a fluid-pressure activated switch. Pressure activated switches are described in the MPL publication available at mpl@pressureswitch.com 555 SW 12 th Avenue Pompano Beach, Florida 33069. Further disclosures of pressure activated switches are found at World Magnetics 810 Hastings Street
5 Traverse City, Michigan 49686, telephone: 231-946-3800 and fax: 231-946-0274 and located on the web at <http://www.worldmagnetics.com>.

United States Patent 5,057,822 to Hoffman issued October 15, 1991 describes a medical gas alarm system is provided which includes a sensor unit pneumatically connected to a medical gas supply line and a switch connected to a valve in the supply line for detecting the open
10 condition of the valve.

In the Hoffman patent, in the event either the sensor detects a high pressure or low pressure condition in the supply line or closing of the valve activates the switch, an alarm signal is received by an alarm module and an alarm is activated. The alarm of the Hoffman patent may be visual, audible or both. During normal operations, the alarm module of the Hoffman patent
15 displays both a system on condition and a digital display indicating the pressure in the supply line.

The Hoffman patent also includes a method of monitoring the condition of a medical gas delivery system which includes sensing the pressure in the gas supply line, detecting the open condition of the valve, transmitting an alarm signal to an alarm module in response to alarm conditions detected either as a result of improper pressure or valve closure, and generating a
20 humanly perceptible alarm warning in response to receipt of an alarm signal.

Fukui in United States Patent 5,457,333 issued October 10, 1995 describes a gas sensor comprises a precious metal electrode, a semiconductor layer entirely or partly covering the precious metal electrode, a barrier layer having a high potential formed at an interface between the precious metal electrode and the semiconductor layer. The Fukui patent recites a gas sensor for
25 use in a leak detector for detecting a fuel gas such as town gas, the sensor comprising a precious metal electrode; and a semiconductor layer at least partly covering said precious metal electrode, wherein the semiconductor layer includes, as a main component, at least one substance selected from the group consisting of tin oxide, zinc oxide and indium oxide. The Fukui patent precious metal electrode is formed of a substance selected from the group consisting of platinum, gold,
30 ruthenium, lead, silver, iridium, and alloys thereof and has a barrier layer having a high potential

formed between said precious metal electrode and said semiconductor layer and on a surface of said precious metal electrode. The barrier layer described in the Fukui patent comprises either a substance formed by electrodeposition and selected from the group consisting of platinum, palladium, gold and rhodium, or a substance formed by thermal decomposition and selected from the group consisting of platinum, palladium and gold, said barrier layer being capable of enhancing sensitivity to isobutane gas relative to other gases.

United States Patent 5,293,866 issued to Padula March 15, 1994 provides a description of an indicator device which can be attached to a standard oxygen flow meter is disclosed. The indicator device described in the Padula patent has a rod along which a pointer can be moved and locked into position. The pointer in the Padula patent can be set at the oxygen flow level prescribed by the physician as indicated by the scale on the oxygen flow meter. If the oxygen flow level, as described in the Padula patent, is changed or if oxygen is discontinued for any period of time, the attendant can then set the oxygen flow to the prescribed level by controlling the valve on the oxygen flow meter so that the float, which indicates oxygen flowing liters per minute is positioned opposite the position of the pointer. The foregoing mechanism recited in the Padula patent prevents erroneous or improper setting of oxygen flow levels to patients after interruption or change of oxygen flow level, which can be dangerous, and life threatening.

To the extent that the foregoing references are relevant to the present invention, they are herein specifically incorporated by reference. Where temperatures are given, they are in degrees C unless otherwise indicated. Pressure measurements are reported in KPa. Percentages and ratios given herein are by weight unless otherwise indicated. Measurements herein are stated in degrees of approximation and where appropriate the word "about" may be inserted before any measurement.

SUMMARY OF THE INVENTION

The present invention describes a personal gas supply delivery system comprising:

a first conduit, for when in use receiving a supply of a gas at a first pressure
from a first gas supply line,

5 said first conduit connected with a gas flow alarm, said gas flow alarm for when in use
for determining an instantaneous difference in the pressure or volume of the
gas per unit of time and the volume of the effluent gas per unit of time,

a second conduit connected with said gas flow alarm, for when
in use receiving the supply of gas through said gas flow alarm,

10 said first conduit having a first connector, for when in use providing a detachable
airtight seal with a compatible connector on the gas supply line, said first
connector located distally from said gas flow alarm, and

said second conduit having a second connector, for when in use providing a
detachable airtight seal with a compatible connector on a second gas supply line,

15 said second connector located distally from said gas flow alarm.

The present invention further describes a personal gas supply delivery system comprising:

a moisturizing vessel, for when in use, having the capability to contain a liquid
to provide a source of moisture to increase the amount of moisture
in a gas passing through the liquid,

20 said moisturizing vessel having a first opening for receiving an influent gas,

said moisturizing vessel having a second opening for an effluent gas,

a first conduit connected with said second opening, said first conduit for when
in use, for receiving the effluent gas,

a gas flow alarm connected with said first conduit, and

25 a second conduit connected with said gas flow alarm, said second conduit in fluid
communication with said first conduit,

said gas flow alarm for determining the instantaneous pressure differential of the influent gas and
the effluent gas.

Yet a further embodiment of the invention is a personal gas supply delivery system comprising:

30 a moisturizing vessel, for when in use, having the capability to contain a liquid

to provide a source of moisture to increase the amount of moisture
in a gas passing through the liquid,
said moisturizing vessel having a first opening for receiving an influent gas,
said moisturizing vessel having a second opening for an effluent gas,
5 a first conduit connected with said second opening, said first conduit for when
in use, for receiving the effluent gas,
a gas flow alarm connected with said first conduit, and
a second conduit connected with said gas flow alarm, said second conduit in fluid
communication with said first conduit,
10 said gas flow alarm for determining an instantaneous difference in the volume of the influent
gas per unit of time and the volume of the effluent gas per unit of time.

BRIEF DESCRIPTION OF THE DRAWINGS

The foregoing and other features of the present invention will become apparent to one skilled in the art to which the present invention relates upon consideration of the following description of the invention with reference to the accompanying drawings, wherein:

5 Figure 1 is a frontal perspective of a finished product embodiment according to the invention;

Figure 2 is a frontal perspective of a part of the finished product embodiment according to the invention;

10 Figure 3 is a sectional view of a part of the finished product embodiment according to the invention taken along line 3-3;

Figure 4 is a partial sectional view of the alarm according to the invention;

Figure 5 is a frontal perspective of a part of the finished product embodiment according to the invention; and

15 Figure 6 is an anterior view of a part of the finished product embodiment according to the invention.

DETAILED DESCRIPTION OF THE INVENTION

As best seen in Figure 1 there is a finished product embodiment according to the present invention. A personal gas delivery system 10 includes a hollow flexible tubing 14. The hollow flexible tubing 14 is conveniently any sufficiently flexible tubing to permit movement without undue risk of crimping, cracking or other damage, which may interrupt the flow of a medical gas.

A suggested hollow flexible tubing 14 is Tygon tubing available from Saint-Gobain Performance Plastics Corporation PO Box 3660, Akron, OH 44309. Saint-Gobain may be reached toll free at 800-798-1544 and direct at 330-798-9240 or at <http://www.tygon.com/>.

The hollow flexible tubing 14 is permanently terminated by a hollow tubing connector 18. The hollow tubing connector 18 is conveniently forced into a nipple connector 24 extending from the gas flow alarm 20. The hollow tubing connector 18 is conveniently detachable from the nipple connector 24 through moderate hand pressure with a twisting motion. The hollow flexible tubing 14 is in fluid communication with the hollow tubing connector 18, and the nipple connector 24.

In a typical usage, it is not necessary to employ any lubricant to ensure an airtight fit of the hollow flexible tubing connector 18 to the nipple connector 24. Similarly, there is no need for caulking or adhesive to ensure an airtight fit of the hollow tubing connector 18 to the nipple connector 24.

The nipple connector 24 is made of a rigid plastic such as polyvinylchloride, polycarbonate. The nipple connector 24 may also be made of other suitable rigid plastic materials.

The nipple connector 24 is affixed at the opposite end thereof with a gas flow alarm 20. The point of attachment of the gas flow alarm 20 to the hollow tubing connector 18 is by a nipple connector 24 extending from the gas flow alarm 20. The nipple connector 24 is more particularly shown in Figure 2. The hollow tubing connector 18 is in fluid communication with the first nipple connector 24.

The gas flow alarm 20 is one, which is suitable for low flow rates and relatively low pressures. Typically, the gas flow alarm 20 is capable of determining the instantaneous pressure differential of a supply of a medical gas in the range of about 0.005 KPa to about 200 Kpa preferably 0.013 KPa to about 150 Kpa, (the equivalent of 0.05 in/H₂O as a low end and 550 in/H₂O), above the ambient atmospheric pressure. That is, the supply of a medical gas will be

determined by a flow rate approximately equal to the ambient pressure with ambient at sea level being 101 KPa (14.7 pounds per square inch).

The low flow rates and relatively low pressures are utilized because the system is designed to provide a supplement of a medical gas to a patient rather than forcing the gas into the lungs of the patient. The system will work to provide accurate data at elevations from slightly below sea level to above about three thousand meters (minus 200 feet mean sea level to about ten thousand feet).

As best seen in Figure 4, a switch 30 suitable for use in the gas flow alarm 20 has a flexible metallic reed 32. The flexible metallic reed 32 is connected at an end 34 to an electrical terminal 36. The electrical terminal 36 is connected to a low voltage current source. The flexible metallic reed 32 has second end 40. The second end 40 of the flexible metallic reed 32 contacts a second electrical terminal 44 to complete an electrical circuit. The flexible metallic reed 32 is sufficiently flexible enough to permit a relatively low flow (consequently low pressure) of a medical gas to displace (break) the second end 40 of the flexible metallic reed 32 away from the second electrical terminal 44 thereby interrupting the electrical circuit. The direction of the flow of the medical gas according to the present invention is shown in figure 4 by the double-headed arrows. A set screw 46 permits the switch 30 to be variably set to accommodate different sensitivities for the gas flow alarm 20. The set screw 46 impinges on the second electrical terminal 44 to place the second electrical terminal 44 in closer proximity to the second end 40 thereby making the switch 30 more sensitive to gas flow.

Suitable gas flow alarms 20 are described in United States Patent 3,133,997 to Greene issued May 19, 1964 that describes a fluid-pressure activated switch. Pressure activated switches are described in the MPL publication available at mpl@pressureswitch.com from Micro Pneumatic Logic Inc., 555 SW 12 th Avenue Pompano Beach, Florida 33069. Further disclosures of pressure activated switches are found at World Magnetics 810 Hastings Street Traverse City, Michigan 49686, telephone: 231-946-3800 and fax: 231-946-0274 and located on the web at <http://www.worldmagnetics.com>. The gas flow alarms described in United States Patent 3,133,997 to Greene, the MPL publication from Micro Pneumatic Logic Inc., and the World Magnetics are specifically incorporated herein by reference.

As best seen in Figure 2, the gas flow alarm 20 has protruding from it a second nipple

connector 52. The second nipple connector 52 is similar in construction and design to the first nipple connector 24. The second nipple connector 52 is in fluid communication with the gas flow alarm 20.

A second hollow tubing connector 58 plastic such as PVC or polycarbonate. The design and construction of the second hollow tubing connector 58 is similar to that of the hollow tubing connector 18. The second hollow tubing connector 58 is in fluid communication with the second nipple connector 52 and accordingly is in fluid communication with the gas flow alarm 20.

The second hollow tubing connector 58 is connected with a second hollow flexible tubing 64. The second tubing connector 58 is conveniently forced into the second nipple connector 52. The hollow flexible tubing 64 is in fluid communication with the hollow tubing connector 58. The second hollow tubing connector 58 is conveniently detachable from the second nipple connector 52 through moderate hand pressure with a twisting motion.

The suggested hollow flexible tubing 64 is Tygon tubing available from the same source as the hollow flexible tubing 14. As with the hollow connector tubing 18, the hollow tubing connector 58 it is not necessary to employ any lubricant to ensure an airtight fit of the hollow tubing connector 58 to the nipple connector 52. Similarly, there is no need for caulking or adhesive to ensure an airtight fit of the hollow connector tubing 58 to the nipple connector 52.

The second hollow flexible tubing 64 is connected with a gas distributive device 70. The point of the connection of the hollow flexible tubing 64 is connected with a gas distributive device 70 is with a unitary to binary connector 74. The unitary to binary connector 74 connects at the unitary opening 76 to the hollow flexible tubing 64. The unitary to binary connector 74 is in fluid communication with the hollow flexible tubing 64. The second hollow flexible tubing 64 is permanently connected to the unitary to binary connector 74.

The unitary to binary connector 74 has a binary opening 78 at the end distal from the unitary opening 76. The binary opening 78 is in fluid communication with the unitary opening 76 and accordingly with the second hollow flexible tubing 64.

The unitary to binary connector 74 is formed of a hollow tube 82 and a second hollow tube 84. The first hollow tube 82 and the second hollow tube 84 are conveniently obtained as a co-extruded material. The first hollow tube 82 and the second hollow tube 84 are typically formed from a flexible material such as the previously discussed Tygon tubing. The first hollow

tube 82 and the second hollow tube 84 are each separately in fluid communication with the binary opening 78.

A clip 88 is conveniently utilized to maintain the first hollow tube 82 and the second hollow tube 84 in close proximity. The clip 88 is a "C" shaped hard plastic into which the first hollow tube 82 and the second hollow tube 84 are inserted and held in place in the interior curvature of the "C" by pressure fitting. The clip 88 is with moderate effort slideably engaged on the outer surface of the first hollow tube 82 and the second hollow tube 84.

The first hollow tube 82 connects with nasal cannula 90 via a first nasal cannula fitting 92. The second hollow tube 84 with a second nasal cannula fitting 96. The first nasal cannula fitting 92 is in fluid communication with first hollow tube 82. The nasal cannula 90 is connected with a second nasal cannula fitting 96. The second nasal cannula fitting 96 is in fluid communication with second hollow tube 84.

The first nasal cannula fitting 92 and the second nasal cannula fitting 96 are a part of the hollow nasal cannula tube 98. The first nasal cannula fitting 92 and the second nasal cannula fitting 96 are both in fluid communication with the hollow nasal cannula tube 98.

The nasal cannula tube 98 has protruding from it a pair of spaced apart nasal fittings 102 and 104. The spaced apart nasal fittings 102 and 104 are in fluid communication with the hollow nasal cannula tube 98.

The spaced apart nasal fittings 102 and 104 have nasal orifices 108 and 110. The nasal orifices 108 and 110 permit the flow of a medical gas out of the nasal cannula tube 98 to the nostrils of a patient in need of the medical gas.

A retaining strap (not shown) is conveniently connected with the nasal cannula tube 98. The retaining strap 118 permits the gas distributive device 70 to be retained around the neck of the patient while the patient is receiving the medical gas. To avoid accidental disconnection and the resultant false alarms, it is suggested that each of the hollow flexible tubing 14 and the hollow flexible tubing 64 be from 25 centimeters to 2 meters, preferably 30 centimeters to one meter in length.

The personal gas delivery system 10 permits the hollow flexible tubing 14 to receive a medical gas, such as oxygen, from a medical gas supply source (not shown). The hollow flexible tubing 14 receives the medical gas allowing the flow of a medical gas to the hollow tubing

connector 18.

The medical gas passes through the hollow tubing connector 18 in an uninterrupted flow to the gas flow alarm 20. The medical gas passes through the gas flow alarm 20. If the flow rate of the medical gas is below a predetermined point then the alarm is activated.

5 The activation of the alarm may be by an audible signal to alert at least the patient that the flow rate of the medical gas is below a predetermined point. As the patient may be suffering from a hearing impairment it is also possible to utilize a visible light to alert the patient that the flow rate of the medical gas is below a predetermined point.

10 As the patient may be patient may be suffering from a hearing impairment and a lack of visual acuity it is also possible to utilize a vibratory mechanism to alert the patient that the flow rate of the medical gas has fallen below a predetermined point. The vibratory mechanism is least favored, as it requires an external power source to avoid premature discharge of the batteries.

15 Each of the alarms, audible, visual and vibratory has disadvantages. As noted the audible alarm is of limited value with a hearing impaired patient. The light activated alarm requires a sighted patient and is of little use when the patient is sleeping or when the alarm light is hidden beneath a blanket or other covering. Similarly, the vibratory mechanism as an alarm is of limited value when the patient is sleeping and may be covered with a blanket which may absorb the vibrations which are intended to alert the patient that the flow rate of the medical gas has fallen below a predetermined point.

20 If the system is otherwise operating properly the medical gas flows through the gas flow alarm 20, through the second nipple connector 52 and into the second hollow tubing connector 58. The medical gas then flows from the second hollow tubing connector 58, into hollow flexible tubing 64, and from there into the gas distributive device 70.

25 The purpose of having the flow of medical gas divided into two flow paths is important in the present invention. As the gas flow alarm 20 is upstream from the nasal cannula tube 90 it possible for any of the components from the gas flow alarm 20 downstream to become non-functional, e.g. blocked. For example, one of the pair of spaced apart nasal fittings 102 and 104 may become blocked because of mucous in the opening the affected nasal fitting.

30 Similarly, one of the first hollow tube 82 and a second hollow tube 84 may be crushed or otherwise blocked. As the present invention permits having the flow of medical gas divided into

two flow paths at least some of the medical gas passing through one of the hollow tubes will likely reach the patient. In any other case, the alarm 20 may be fully functional and the patient would still not receive an adequate supply of the medical gas.

Thus, as an additional feature to the alarm aspect of the present invention is a transmitter 200. The transmitter 200 is shown in Figure 6. The transmitter 200, when connected with the gas flow alarm 20, transmits the fact that the flow rate of the medical gas has fallen below a predetermined point to a remote receiving location such as a nursing station. The transmitter 200 is any conventional low power device that does not interfere with the operation of the overall system. The transmitter 200 transmits through an antenna 202.

A second embodiment of the present invention employs the feature of moisturizing a medical gas to be supplied to the patient. As best seen in Figure 5, is a medical gas supply line 210. The medical gas supply line 210 is connected with a humidifying vessel 220. The humidifying vessel 220 comprises a humidifying container 222 and a humidifying container cap 224.

The humidifying container 222 has a screw sealing mechanism at its upper opening. The humidifying container cap 224 has a screw sealing mechanism. The humidifying container cap 224 has a screw sealing mechanism is mated to the screw sealing mechanism of the humidifying container 222. The humidifying container cap 224 has extending there through a first opening 228. The humidifying container cap 224 has extending there through a second opening 232.

A gas delivery conduit 236 extends through the first opening 228 in the humidifying container cap 224. The gas delivery conduit 236 extends into the humidifying container 222, when the humidifying container cap 224 is screwed onto the humidifying container 222, to a point just above the humidifying container lower surface 238. In practice, the gas delivery conduit 236 will be below the level of the humidifying liquid in the humidifying container 222.

A gas receiving conduit 242 extends through the second opening 232 in the humidifying container cap 224. The gas receiving conduit 242, extends into the humidifying container 222, when the humidifying container cap 224 is screwed onto the humidifying container 222, to a point just below the bottom 244 of the humidifying container cap 224. When the personal gas delivery system 10 is in operation the gas receiving conduit 242 will not extend below the level of the humidifying liquid in the humidifying container 222.

A medical gas is introduced to the delivery conduit 236 and into the humidifying container 222. The humidifying container 222 is filled to a point about 2 centimeters below its top with distilled water. The gas delivery conduit 236 is below the level of the humidifying liquid in the humidifying container 222. The medical gas from the gas delivery conduit 236 is humidified in the
5 humidifying container 222.

The gas receiving conduit 242 takes up the humidified medical gas. The double-headed arrows in Figure 5 show the direction of gas flow. The medical gas then passes through the gas flow alarm 20 as previously described.

10 A third embodiment of the invention is shown in Figure 6. In the last embodiment of the invention there is disclosed a switch 300 for the gas flow alarm 20. The gas flow alarm 20 has an anterior surface 302. Located on the anterior surface 302 is a light 304 for alerting the patient that the gas flow alarm 20 has detected a low pressure or low flow rate of the medical gas.

15 To allow the patient to be confident that the gas flow alarm 20 is operating properly there is an alarm test switch 306. A second switch on the anterior surface of the gas flow alarm 20 is a reset switch 306. The reset switch 306 is located on the anterior surface 302 of the gas flow alarm 20. The gas flow alarm 20, when activated will provide a continuous signal until the alarm is reset, or the alarm is inactivated, or the batteries are depleted.

20 Accordingly, there is a need to manually reset the alarm when the alarm is activated. When the medical gas supply is intentionally interrupted such as to replace the gas supply, to provide services to the patient such as bathing the patient, or to replenish the humidifying liquid 242 in the humidifying container 222, it is desirable to turn off the gas flow alarm 20.

Accordingly, the gas flow alarm 20 may also provide an on off switch (or a test feature) 310.

25 Although the above description and accompanying drawings relate to a specific preferred embodiment as presently contemplated by the inventors, it will be understood that the invention in its broad aspect includes mechanical and functional equivalents of the elements described and illustrated.

What is claimed is:

1. A personal gas supply delivery system comprising:
a moisturizing vessel, for when in use, having the capability to contain a liquid
to provide a source of moisture to increase the amount of moisture
in a gas passing through the liquid,
said moisturizing vessel having a first opening for receiving an influent gas,
said moisturizing vessel having a second opening for an effluent gas,
a first conduit connected with said second opening, said first conduit for when
in use, for receiving the effluent gas,
a gas flow alarm connected with said first conduit, and
a second conduit connected with said gas flow alarm, said second conduit in fluid
communication with said first conduit,
said gas flow alarm for determining the instantaneous pressure differential of the influent gas
and the effluent gas.
2. The personal gas supply delivery system according to claim 1 wherein said second
conduit is further connected with a gas distributive device, said gas distributive device for
receiving the effluent gas and distributing the effluent gas to a subject desiring to receive the
effluent gas.
3. The personal gas supply delivery system according to claim 1 wherein the gas
flow alarm is set to alert a subject desiring to receive the effluent gas when the pressure
differential of the influent gas and the effluent gas has met at least one predetermined setting.
4. The personal gas supply delivery system according to claim 1 wherein the gas flow alarm is
set to alert the recipient of the effluent gas by at least one of an audible signal, a visual signal, and a
vibratory signal.
5. The personal gas supply delivery system according to claim 1 wherein the gas
flow alarm is set to alert a subject desiring to receive the effluent gas when the pressure differential

of the influent gas and the effluent gas has met at least one predetermined setting and the alerting of the subject is by visible light.

6. The personal gas supply delivery system according to claim 1 wherein the gas flow alarm is set to alert a subject desiring to receive the effluent gas when the pressure differential of the influent gas and the effluent gas has met at least one predetermined setting and the alerting of the subject is audible.

7. The personal gas supply delivery system according to claim 1 further comprising a reset or test feature.

8. The personal gas supply delivery system according to claim 7 wherein the gas flow alarm has an anterior surface including an alarm reset or test feature located substantially flush with or below the said anterior surface.

9. The personal gas supply delivery system according to claim 1 wherein the gas flow alarm is set to alert a second person by means of a transmitter and a receiver that the pressure or volume per unit of time of the influent gas and the effluent gas has met at least one predetermined setting.

10. The personal gas supply delivery system according to claim 9 wherein the second person is alerted by a radio signal.

11. A personal gas supply delivery system comprising:

a moisturizing vessel, for when in use, having the capability to contain a liquid
to provide a source of moisture to increase the amount of moisture
in a gas passing through the liquid,
said moisturizing vessel having a first opening for receiving an influent gas,
said moisturizing vessel having a second opening for an effluent gas,
a first conduit connected with said second opening, said first conduit for when
in use, for receiving the effluent gas,

a gas flow alarm connected with said first conduit, and

a second conduit connected with said gas flow alarm, said second conduit in fluid
communication with said first conduit,

5 said gas flow alarm for determining an instantaneous difference in the volume of the influent
gas per unit of time and the volume of the effluent gas per unit of time.

12. The personal gas supply delivery system according to claim 11 wherein said second conduit
is further connected with a gas distributive device, said gas distributive device for receiving the
effluent gas and distributing the effluent gas to a subject desiring to receive the effluent gas.

10 13. The personal gas supply delivery system according to claim 11 wherein the gas flow alarm is
set to alert a subject desiring to receive the effluent gas when an instantaneous difference in the
volume of the influent gas per unit of time and the volume of the effluent gas per unit of time has met
at least one predetermined setting.

14. The personal gas supply delivery system according to claim 11 wherein the gas flow alarm is
set to alert the recipient of the effluent gas by at least one of an audible signal, a visual signal, and a
vibratory signal.

15. The personal gas supply delivery system according to claim 11 wherein the gas flow alarm is
set to alert a subject desiring to receive the effluent gas when the volume differential of the influent
gas and the effluent gas has met at least one predetermined setting and the alerting of the subject is
by visible light.

25 16. The personal gas supply delivery system according to claim 11 wherein the gas flow alarm
is set to alert a subject desiring to receive the effluent gas when the volume differential of the influent
gas and the effluent gas has met at least one predetermined setting and the alerting of the subject is
audible.

30 17. The personal gas supply delivery system according to claim 1 further comprising a reset or

test feature.

18. The personal gas supply delivery system according to claim 11 wherein the gas flow alarm has an anterior surface including an alarm reset or test feature located substantially flush with said anterior
5 surface.

19. The personal gas supply delivery system according to claim 18 wherein the gas flow alarm is set to alert a second person by means of a transmitter and a receiver that the pressure differential or the volume differential per unit of time of the influent gas and the effluent gas has met at least one
10 predetermined setting.

20. The personal gas supply delivery system according to claim 7 wherein the second person is alerted by a radio signal.

21. A personal gas supply delivery alarm system comprising:
a first conduit, for when in use receiving a supply of a gas at a first pressure
from a first gas supply line,
said first conduit connected with a gas flow alarm, said gas flow alarm for when in use
for determining an instantaneous difference in the pressure or volume of the
gas per unit of time and the volume of the effluent gas per unit of time,
a second conduit connected with said gas flow alarm, for when
in use receiving the supply of gas through said gas flow alarm,
said first conduit having a first connector, for when in use providing a detachable
airtight seal with a compatible connector on the gas supply line, said first
connector located distally from said gas flow alarm, and
said second conduit having a second connector, for when in use providing a
detachable airtight seal with a compatible connector on a second gas supply
line, said second connector located distally from said gas flow alarm.

22. The personal gas supply delivery system according to claim 21 wherein said second conduit

is further connected with a gas distributive device, said gas distributive device for receiving the gas and distributing the gas to a subject desiring to receive the gas.

23. The personal gas supply delivery system according to claim 21 wherein the gas flow alarm is set to alert a subject desiring to receive the gas when an instantaneous difference in the volume of the influent gas per unit of time and the volume of the effluent gas per unit of time has met at least one predetermined setting.

24. The personal gas supply delivery system according to claim 21 wherein the gas flow alarm is set to alert a subject desiring to receive the gas when the pressure of the gas has met at least one predetermined setting.

25. The personal gas supply delivery system according to claim 21 wherein the gas flow alarm is set to alert the recipient of the gas by at least one of an audible signal, a visual signal, and a vibratory signal.

26. The personal gas supply delivery system according to claim 21 wherein the gas flow alarm is set to alert a subject desiring to receive the effluent gas when the volume of the gas or the pressure of the gas has met at least one predetermined setting.


28. The personal gas supply delivery system according to claim 21 wherein the gas flow alarm is set to alert a second person by means of a transmitter and a receiver that the pressure or the volume per unit of time of the gas has met at least one predetermined setting.

29. The personal gas supply delivery system according to claim 21 further comprising a reset or test feature.

30. The personal gas supply delivery system according to claim 29 wherein the gas flow alarm has an anterior surface including an alarm reset or test feature located substantially flush with said anterior surface.

ABSTRACT OF THE INVENTION

A supply of gas such as oxygen is provided to a person in need of such gas supply. The delivery system includes an alarm to alert the recipient of the gas or another when and if the gas supply is disrupted. The alarm system preferably includes a reset and on-off switch that is
5 recessed sufficiently to prevent accidental disabling of the alarm system.

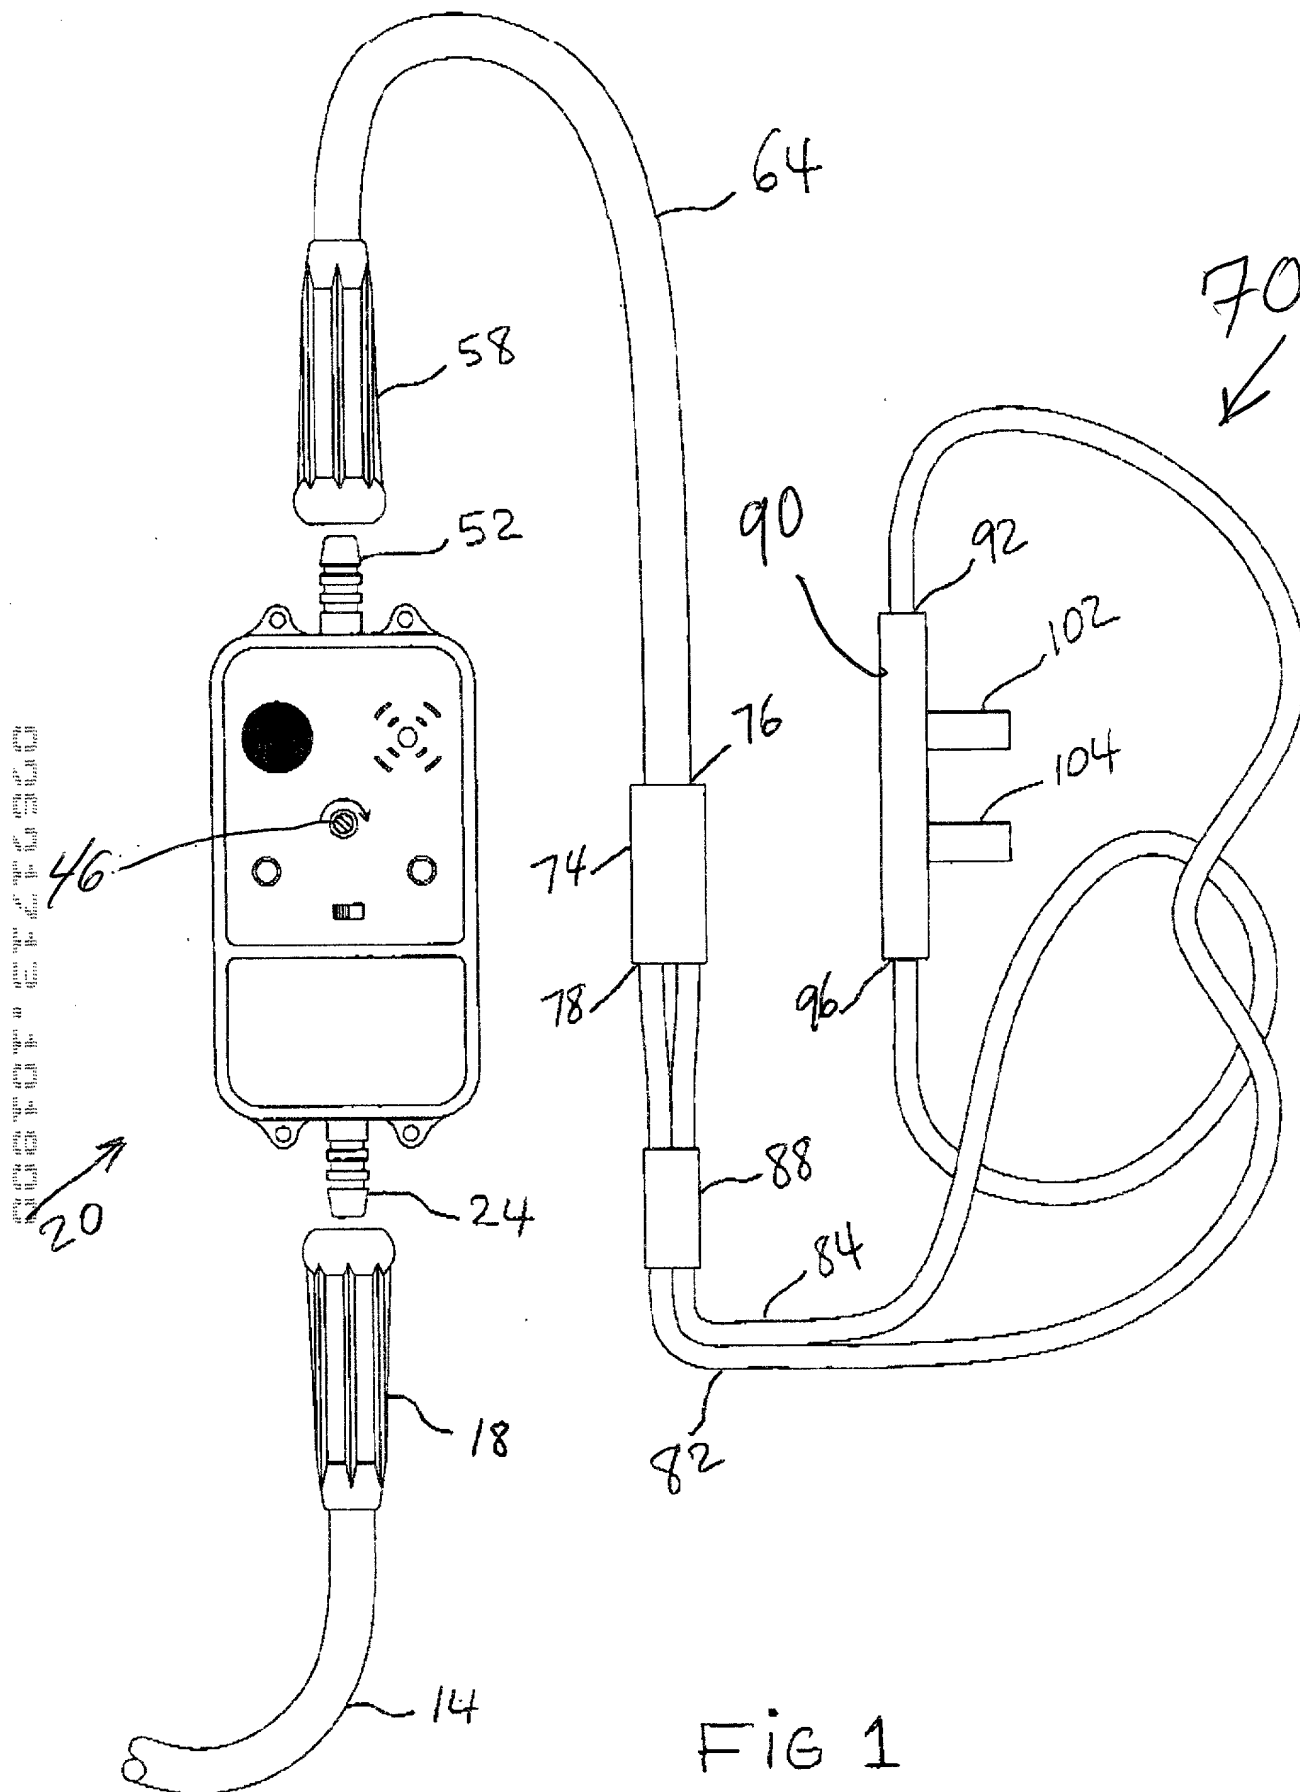

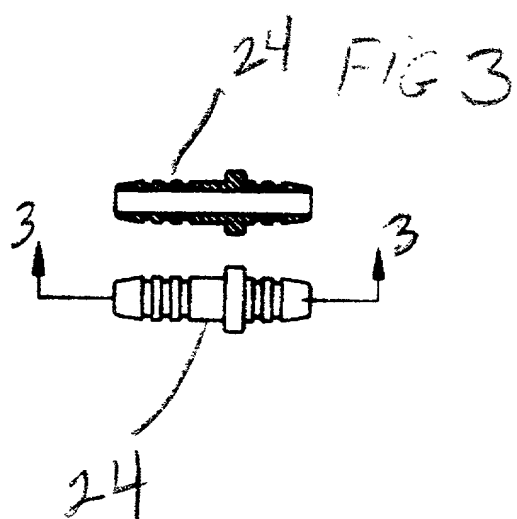


FIG 2

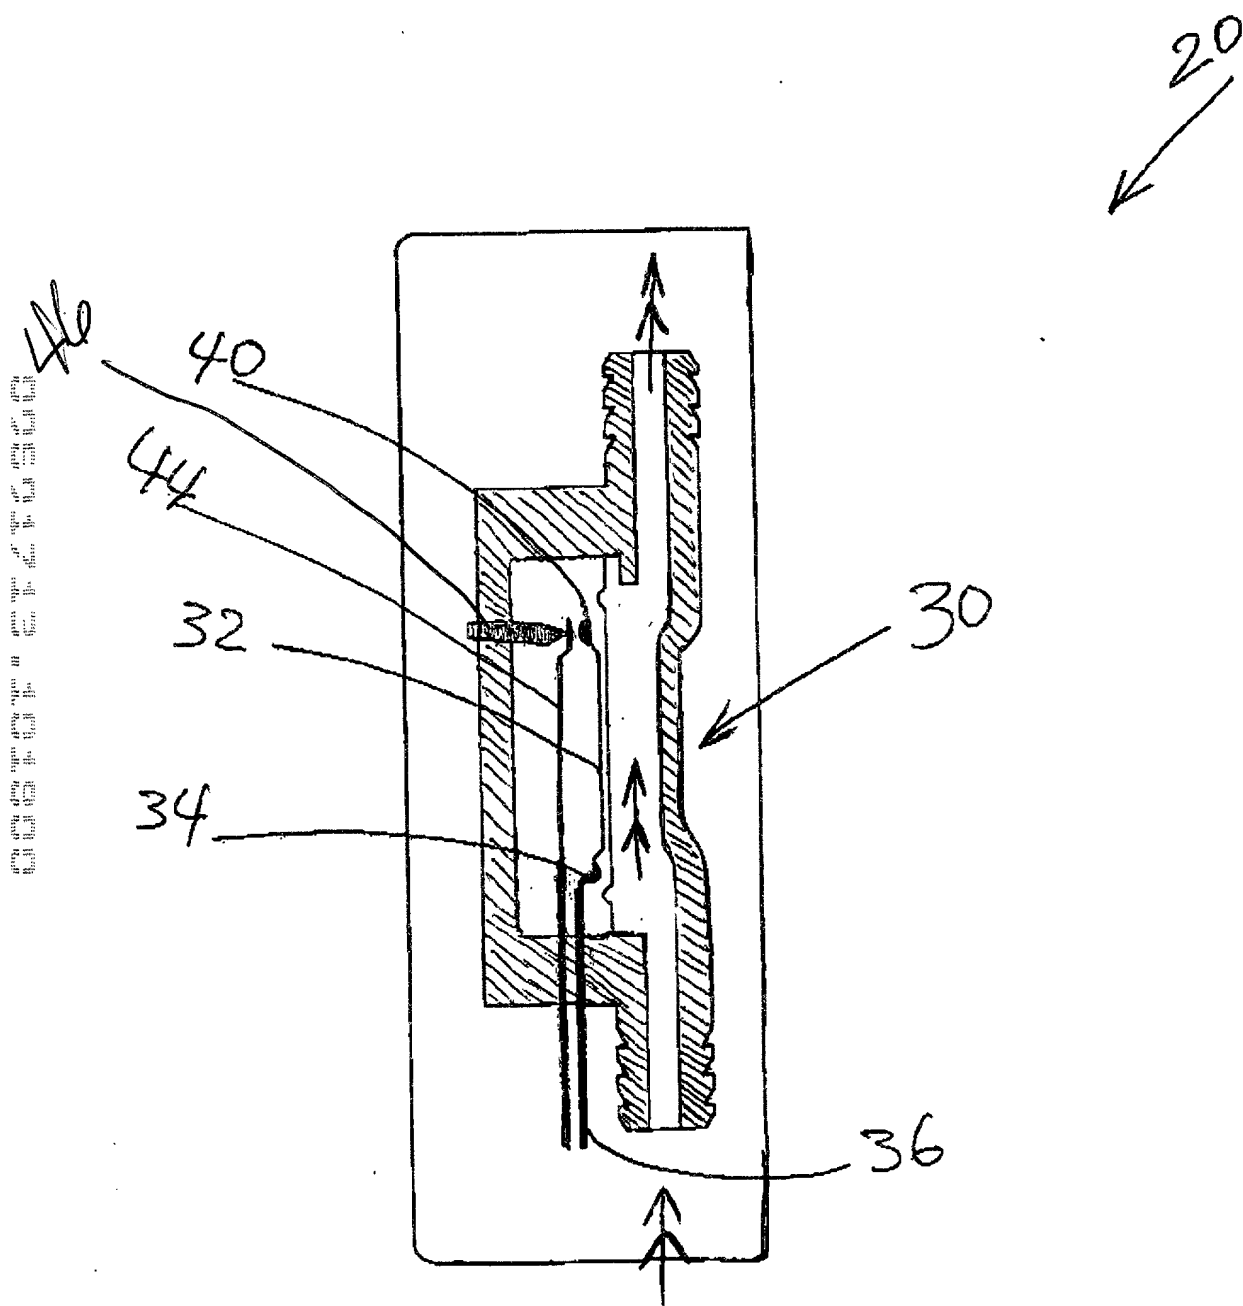


FIG 4

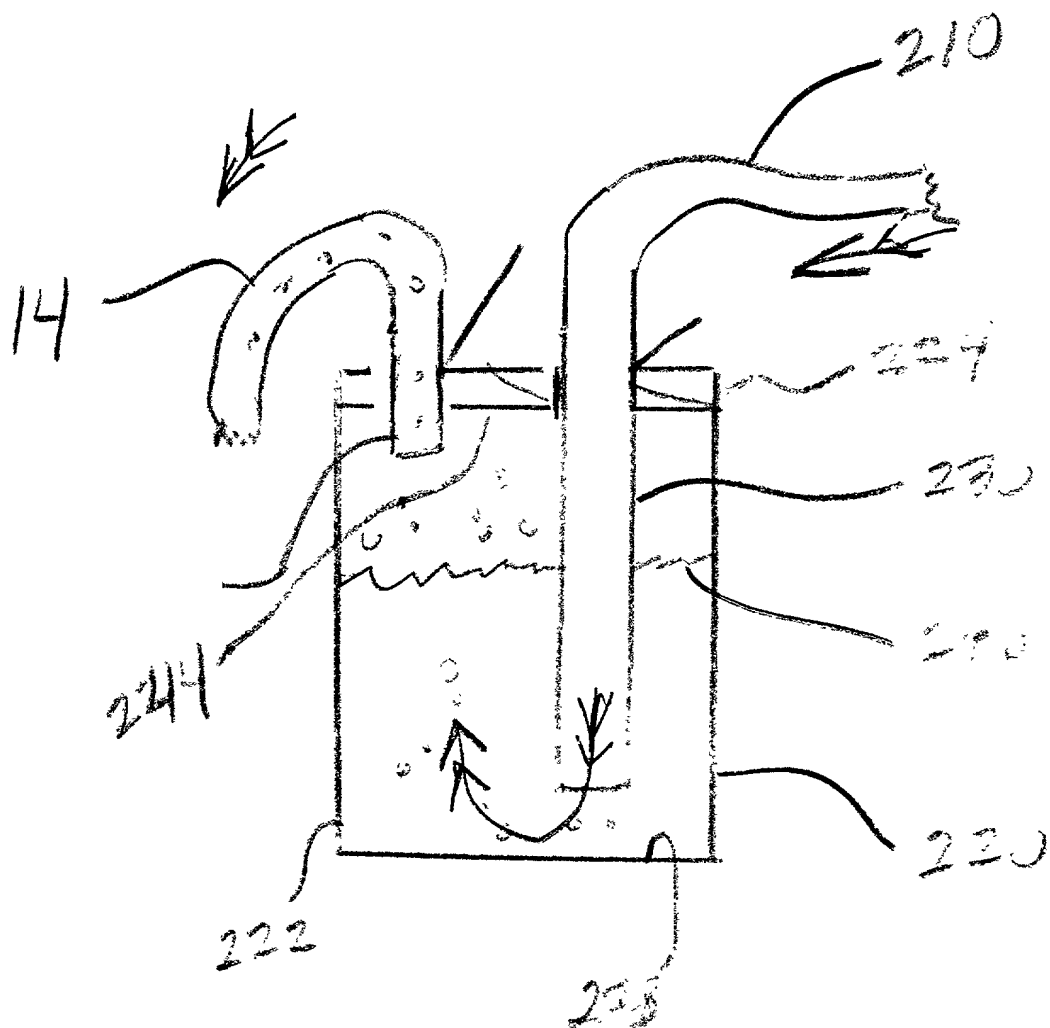


FIG 5

Handwritten text, possibly a date or reference number, oriented vertically on the left margin.

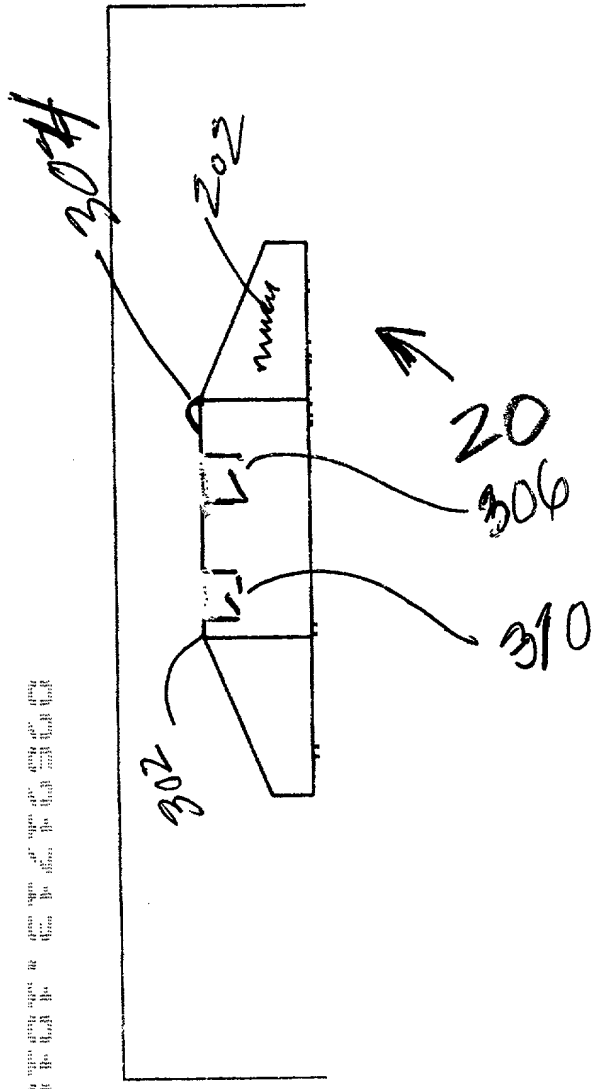


Fig 6

Attorney's Docket No. 1161

COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

TYPE OF DECLARATION

This declaration is of the following type: *(check one applicable item below)*☒ original☐ design☐ supplemental☐ divisional☐ continuation☐ continuation-in-part (CIP)

INVENTORSHIP IDENTIFICATION

My residence, post office address and citizenship are as stated below next to my name. I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

TITLE OF INVENTION

Personal Gas Supply Delivery System

SPECIFICATION IDENTIFICATION

the specification of which: *(complete (a), (b) or (c))*(a) ☒ is attached hereto.

(b) ☐ was filed on october 18, 2000 as ☐ Serial No. 0 / _____ or ☐ Express Mail No., EG296080635US US
as *Serial No. 0 / _____* and was amended on _____ *(if applicable)*.

ACKNOWLEDGEMENT OF REVIEW OF PAPERS AND DUTY OF CANDOR

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37, CODE OF FEDERAL REGULATIONS, § 1.56.

POWER OF ATTORNEY

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. *(List name and registration number.)*

FORREST L. COLLINS, 27,186

SEND CORRESPONDENCE TO:

Forrest L. Collins

Post Office Box 41040

Brecksville, Ohio

44141-1043 Telephone: 440-526-0610 Facsimile 440-526-1819

DECLARATION

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under SECTION 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

SIGNATURE(S)

Full name of sole or first inventor: Joseph E. Coury

(GIVEN NAME) (MIDDLE INITIAL OR NAME) (FAMILY (OR LAST NAME))

Inventor's signature Joseph E. Coury

Date October 17, 2000 Country of Citizenship UNITED STATES OF AMERICA

Residence 1194 Hall Ave Lakewood, Ohio 44107

P. O. Address 1194 Hall Ave Lakewood, Ohio 44107

Full name of sole or first inventor: John S. Massaad

(GIVEN NAME) (MIDDLE INITIAL OR NAME) (FAMILY (OR LAST NAME))

Inventor's signature John S. Massaad

Date October 17, 2000 Country of Citizenship UNITED STATES OF AMERICA

Residence 1198 Hall Ave Lakewood, Ohio 44107

P. O. Address 1198 Hall Ave Lakewood, Ohio 44107

THE DECLARATION ENDS WITH THIS PAGE.